

LINEAR*Essential*

design
something
different.

PRODUCT
CATALOG

Essential, because premium
performance is essential.


LINEAR*Essential*

.040" Fabricated Plank System

Designed around the essentials.

Linear Essential streamlines the process with standardized plank widths and an efficient manufacturing platform.

Delivering the same concealed patent pending attachment system, providing quicker fabrication, simplified installation, and exceptional value, making it an ideal choice for projects where speed and efficiency are key.

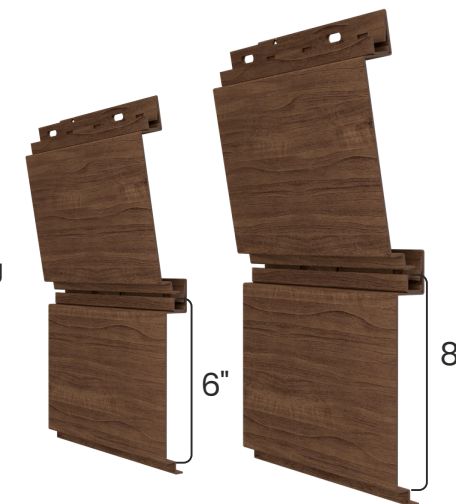

*Customized
Lengths 6ft-10ft*

! Other sizes available.
Contact ZPS representative.



HIGHER PERFORMANCE

LINEAR Essential plank systems have been tested to withstand ultimate wind pressures up to 180-200 PSF while utilizing attachment spacing up to 48" O.C.



NON-COMBUSTIBLE

Manufactured from aluminum, LINEAR Series provide a non-combustible architectural solution suitable for projects requiring enhanced fire performance.



INTEGRATED SPLICE PLATES

Factory-finished, color-matched splice plates create a clean, seamless appearance while simplifying installation in the field.



FINISH PERFORMANCE

Available in premium woodgrain, solid color, and faux finishes, LINEAR Essential are engineered to maintain their appearance with outstanding resistance to fading, chalking, and weathering.



LOW MAINTENANCE

Enjoy the warmth and appearance of wood without the ongoing upkeep. Our LINEAR Series requires minimal maintenance and never need staining, sealing, or refinishing.




SUSTAINABLE DESIGN

Aluminum is one of the world's most recyclable building materials. The LINEAR Series support sustainable construction practices through long service life and recyclability.

SYSTEM SPECS

.040" Aluminum 5052 Marine-Grade Alloy	ATTACHMENT Concealed Integrated Clip
Panel Depth 1" Standard	Reveals 1/2" Horizontal
Finish FEVE & Sublimation	Finish Warranty Up to 25 Years

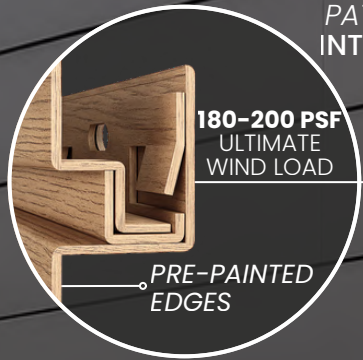

PATENT PENDING
INTEGRATED CLIP
DESIGN

**BETTER.
FASTER.
STRONGER.**

✓
48" O.C. FASTENER SPACING
180-200 PSF ULTIMATE WIND LOAD

INTEGRATED SPLICE PLATES

Designed to integrate directly
with the LINEAR system.



**CUSTOM COLOR MATCH YOUR
SPLICE PLATE**

PLANK INSTALL COMPARISON CHART

Features	Industry Standard	LINEAR <i>Essential</i>
Installation Crew Size	2-3 People ✕	1-2 People ✓
Wind Load Performance at Standard 32" Fastener Spacing	40 PSF ✕	180-200 PSF ✓
Cuts Required on Both Ends for Every Plank	YES; Min 1/2" ✕	NOT REQUIRED ✓
Touch-Up on Butt Joint Ends Required	YES ✕	NOT REQUIRED ✓

**UP TO 75%
LABOR SAVINGS**

STANDARD WOODGRAIN FINISHES



LEMON
BAMBOO

NATURAL
OAK

WEATHERED
REDWOOD

SANDY
BAMBOO



LIGHT TOASTED
FIR

LIGHT TOASTED
PINE

GOLDEN
OAK

COUNTRY
PINE



BURNT
BAMBOO

WEATHERED
OAK

BURNT
REDWOOD

AMERICAN
REDWOOD



DARK NATIONAL
WALNUT

BURNT
WALNUT



**MORE FINISH
OPTIONS**



**NEED A
CUSTOM FINISH?**

Custom woodgrain, stone,
weathering steel effect, and color-
match options are available.